




OASIS-PLUS

120V

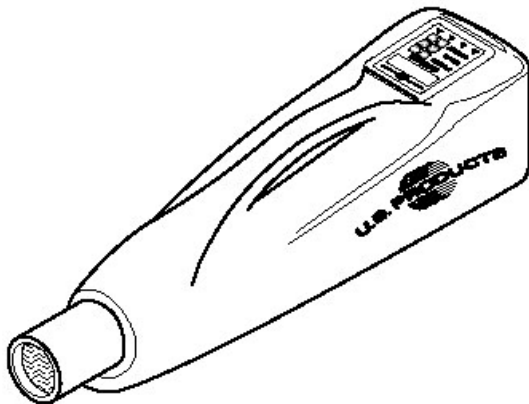

INFORMATION & OPERATING INSTRUCTIONS

READ ALL INSTRUCTIONS BEFORE OPERATING

OZONE IS A POWERFUL OXIDIZER AND MUST BE USED WITH CARE

WARNING: USE IN UNINHABITED AREAS ONLY. CONSULT MSDS SHEET BEFORE USE. Ozone attacks organic matter. Limited exposure can cause irritation to eyes, throat, and nose, and it may cause nausea. **Do not re-inhabit a treated area until it has been well ventilated.** Prolonged exposure can also affect certain organic materials such as rubber, plastic, wire insulation. Do not get the machine wet.

IMPORTANT SAFETY INSTRUCTIONS

This machine is only suitable for commercial use, for example in hotels, schools, hospitals, factories, shops and offices other than normal residential housekeeping purposes.

When using any electrical appliance, basic precautions should always be followed, including the following:

NOTE: Read all instructions before using this machine.

WARNING!

To reduce the risk of fire, electric shock, or injury:

- USE IN UNINHABITED AREAS ONLY.
- To avoid electric shock, do not expose to rain or snow. Store, and use, indoors.
- Do not allow to be used as a toy. Close attention is necessary when used near children.
- Use only as described in this manual. Use only the manufacturer's recommended attachments.
- Do not use with damaged cord or plug. If the machine is not working as it should, has been dropped, damaged, left outdoors or dropped into water, return it to a service center.
- Do not pull by the cord, use the cord as a handle, close a door on the cord, or pull the cord around sharp edges or corners. Do not run the machine over the cord. Keep the cord away from heated surfaces. To unplug, grasp the plug, not the cord.
- Do not handle the plug, the cord or the machine with wet hands.
- Extension cords must be 12/3 and no longer than 50 feet. Replace the cord or unplug immediately if the ground prong becomes damaged.
- Do not put any object into openings. Do not use with any opening blocked; keep free of dust, lint, hair, and anything that may reduce air flow.
- Connect to a properly grounded outlet only.

INSPECTION:

Carefully unpack and inspect the OASIS PLUS for shipping damage. Each unit is tested and inspected before shipment. Any damage incurred is the responsibility of the carrier, who should be notified immediately.

All cleaning and maintenance work should be completed before using the Ozone machine. Ozone treatment should be the final step in room maintenance.

NOTE: the air flowing into the machine must be clean and dry.

NOTE: if the air intake filter is dirty or missing, warranty is voided.

OPERATION:

NOTE: Ozone is a toxic gas. Follow all safety precautions.

1. Make certain all people, pets, and plants are out of area. Close all windows and doors.
2. Make sure the filter in front of the cooling fan is installed and is clean.
3. Place the Oasis Plus unit on a shelf or tabletop as high as possible in the area to be treated.
4. Plug the power cord into a grounded, 3-prong outlet.
5. Set the timer to the desired length of time. Momentarily pressing the UP timer button for one second will increase the time setting by one minute at a time. Hold the button for 1 -3 seconds to change the time value by two minutes per second. Hold the button for longer than 3 seconds and the time setting will change in 20 minutes increments. The maximum time setting is 29:59 hours. After reaching the maximum time, the timer will wrap back to 00:00 and then continue increasing. When the time is being decreased and reaches 00:00, it will wrap to 29:59 and continue decreasing.
6. Select the desired power level: 25%; 50%; 75% 100%. The Oasis Plus always defaults to 100% when you plug it in. When the output level is set to 100%, the machine makes ozone continuously until the timer runs out or the OFF button is pressed. At other power level settings, the machine will produce ozone for the fraction of a minute the level is set at. For example, if the output level is set to 75%, the machine will produce ozone for 75% (45 seconds) of each minute. At 50%, ozone is generated for 30 seconds of each minute, and at 25%, the ozone generation lasts for 15 seconds of each minute. On any setting other than 100%, the ozone generator will be cycling the ozone ON and OFF.
7. Turn the unit on by pressing the ON button. Leave the area.
8. When treatment is complete, unplug the ozone machine and ventilate the area completely until all smell of ozone is gone. Do NOT allow people, pets, or plants back into the area until all smell of ozone is dissipated.

NOTE: This machine is only suitable for commercial use, for example in hotels, schools, hospitals, factories, shops and offices other than normal residential housekeeping purposes. **Record the serial number and model of your new extractor here:** _____

(and be sure to mail your warranty card)

Serial Number: _____ **Model:** Oasis-Plus

Purchase Date:_____

Write the name and phone number of your distributor:

TIME GUIDELINES:

This Oasis Plus unit will control biological contamination and odor in areas up to 40,000 FT³.

Use the following times as a guideline.



Hotel/Motel Room:	20 -- 60 Minutes
Automobiles:	20 -- 30 Minutes
Fire & Flood Restoration:	12 -- 72 Hours.

For Automobiles:

Refer to Figure 1 and Figure 2 below

1. Install the hose onto the electrode chamber. Secure the hose with the hose clamp.
2. Set the Ozone Plus on top of the car or on a cart or table next to the car.
3. Install the foam block into a partially closed car window, and insert the hose through the hole in the foam.
4. Set the time and the output level.
5. Turn the ozone machine ON.

When treatment is complete, ventilate the car completely. Repeat treatment if necessary.

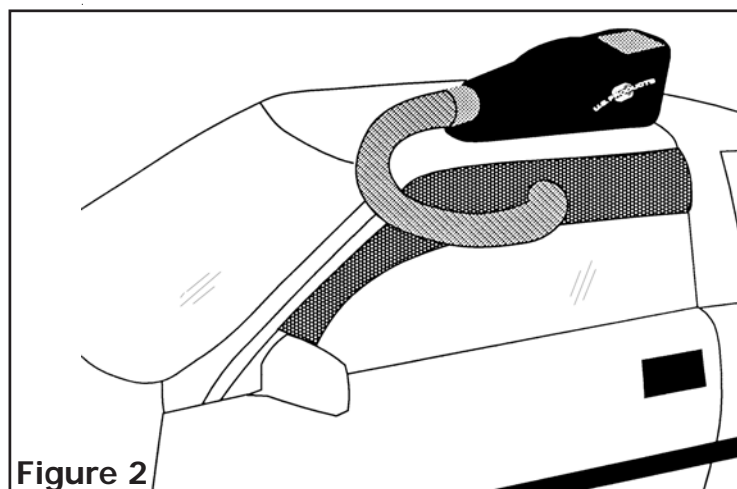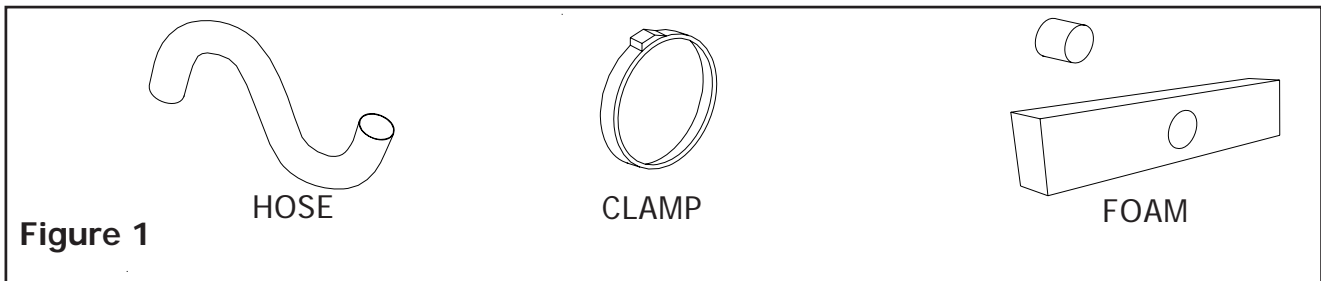

NOTE: Ozone destroys odor causing molecules, thus eliminating the source of the odor. The length of time this process takes will vary depending on the amount of contaminants the ozone has to work on, the amount of area being treated, temperature and humidity, the amount and type of furniture in the area, etc.

NOTE: the process can produce a haze in the treatment area.

OZONE ACTUALLY SEEKS OUT AND DESTROYS THE BACTERIA AND MOLECULES THAT CAUSE ODORS

Not a simple coverup or ionizer, the OASIS PLUS unit is an economical environmental odor neutralizer that actually destroys the source of the odor and leaves pure, fresh oxygen in its place. This large capacity ozone generator is ideal for commercial use. It is excellent for removing odors from smoke damage, mold, mildew, pet and other sources commonly encountered in building maintenance and refurbishing.

The OASIS PLUS will eliminate odor in any indoor location, including basements, kitchens, bathrooms, and more. It also provides rapid deodorizing of hotel/motel rooms, meeting rooms, and used cars, boats and RVs.


NOTE: Ozone treatment should be the final step in cleaning or restoration.

NOTE: Do not allow people, pets, or plants back into the treated area until it has been well ventilated and the smell of ozone has dissipated.

FEATURES AND SPECIFICATIONS

- DESTROYS THE SOURCE OF THE ODOR: not just a cover-up or ionizer
- REMOVES ODORS caused by smoke, pets, mold, mildew, etc.
- 30 HOUR DIGITAL TIMER/PROGRAMMER
- VARIABLE OZONE OUTPUT SETTINGS
- HIGH DENSITY ceramic and stainless steel electrodes (patented)
- POWER SUPPLY OVERLOAD PROTECTION
- OUTPUT: 6.6 ppm or 2.2 gr/hr
- RUGGED CONSTRUCTION: Rotational molded hexane co-polymer body (lifetime warranty)
- DIMENSIONS: 8" H X 8"W X 22"L
- WEIGHT: 12-1/2 lb
- MADE IN THE U.S.A.
- No plates or UV tubes to maintain
- WARRANTY: 3 year with LIFETIME WARRANTY on the ozone electrodes (patented)

OASIS PLUS 120V

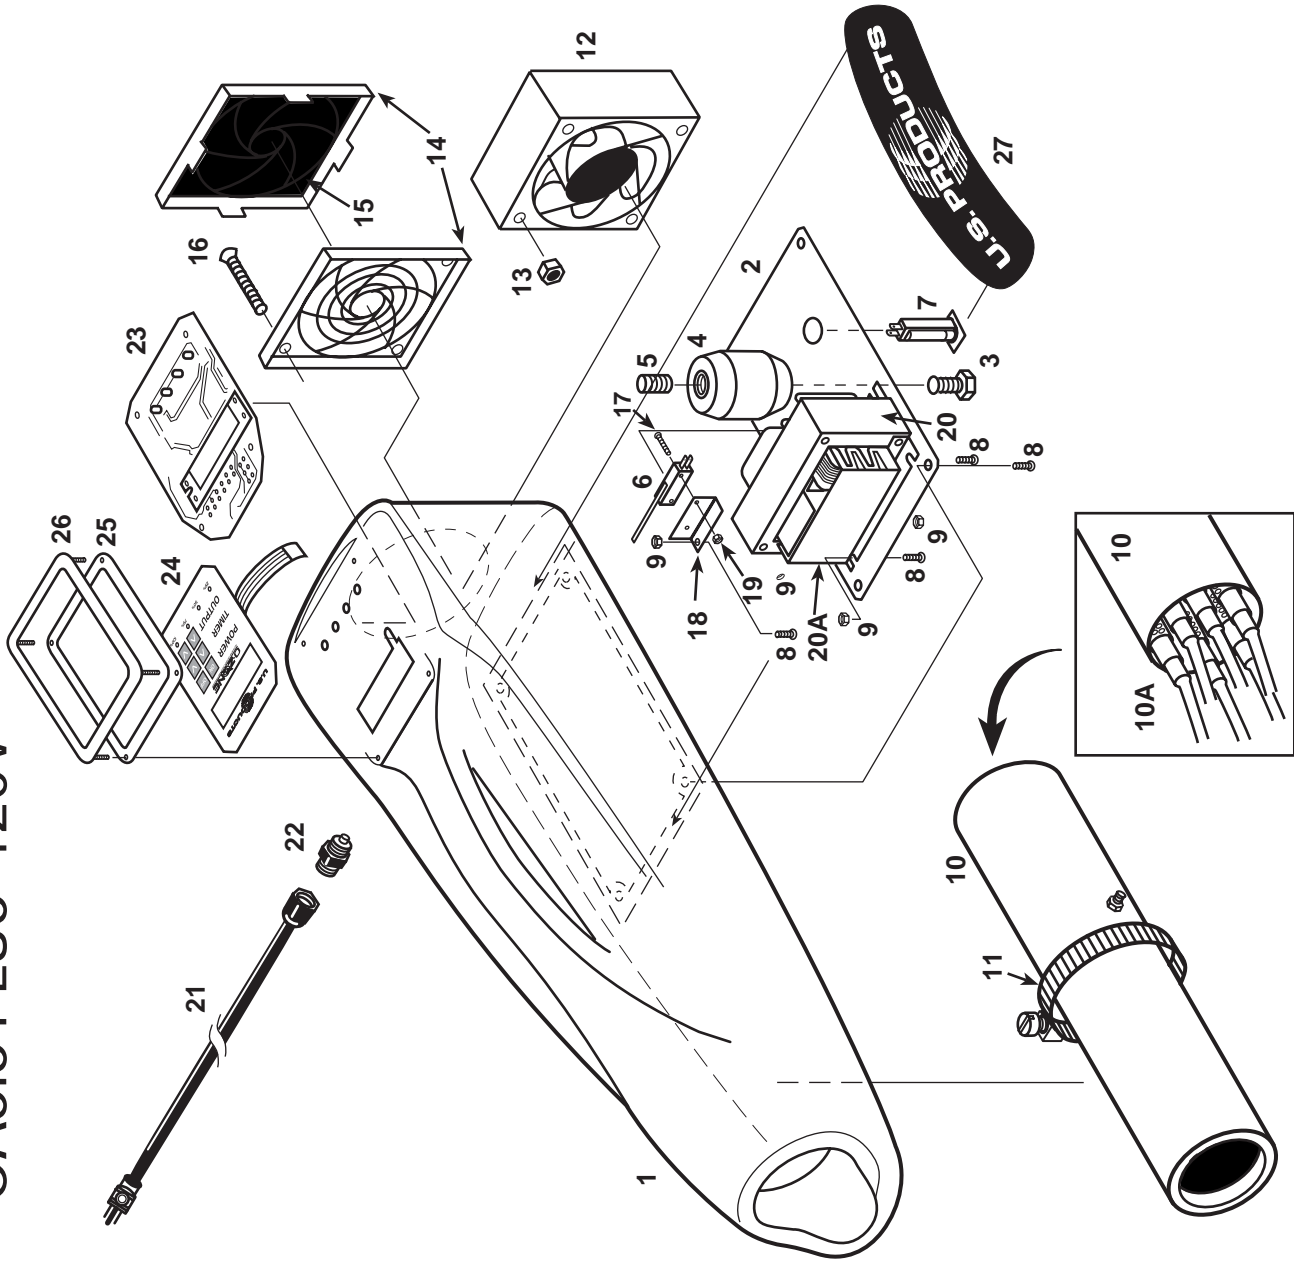

ITEM No.	DESCRIPTION	PART No.
#1	Housing	OZ-1
#2	Mounting Plate, bottom	OZ-18AB
#3	Bolt, 3/8 X 1/2"	326
#4	Terminal Block	OZ-10
#5	Stud, 3/8 X 1-1/8"	327
#6	Safety Switch	OZ-8
#7	Circuit Breaker, 1/2 amp	OZ-5
#8	Bolt	364
#9	Lock nut, nylock	17
#10	Electrode Chamber	FP242
#10A	Electrode Assembly	FP241
#11	Hose Clamp	198
#12	Fan	2014
#13	Lock nut	324
#14	Fan cover + filter	2015A
#15	Filter only	2015B
#16	Bolt, 8/32 X 2-1/2"	323
#17	Screw, 4-40 X 5/8" S/S	328
#18	Bracket, for safety switch	OZ-22
#19	Lock nut 4-40, S/S	18
#20	Strap, holding	OZ-19
#20A	Transformer	OZ-4PTI-1
#21	Power Cord, 6 ft	OZ-11
#22	Cord Retainer	230 & 230A
#23	Control Board Assembly	OZ-17
#24	Touch Pad	OZ-20
#25	Gasket	OZ-16A
#26	Bezel	OZ-16
#27	Label	OZ-23



OASIS-PLUS

120V

NOTES:



208-772-0573 · 800-257-7982 · FAX: 208-772-0577

Coeur d'Alene, Idaho

VISIT US AT: <http://www.usproducts.com>