



- ✓ **single bearing system**
- ✓ **stainless**
- ✓ **live swivel**
- ✓ **longevity**
- ✓ **tough construction**

#### Application

- ✓ hose connections
- ✓ high pressure guns
- ✓ hydraulics



<b>Pressure</b>	4000 psi
<b>Temperature</b>	250°F
<b>RPM</b>	max. 30 rpm
<b>Body</b>	stainless steel
<b>Inner part</b>	brass, nickel plated
<b>Seal</b>	stainless steel
<b>Bearing</b>	O-ring
<b>1x thrust ball bearing</b>	

**Throughput medium** water, oil etc.  
 pH 3 - 12  
 filtered 10 microns  
 compressed air (290 psi)

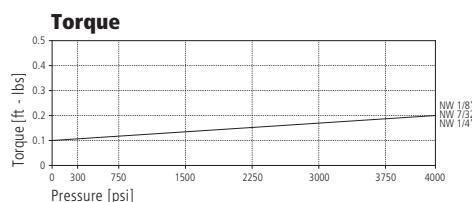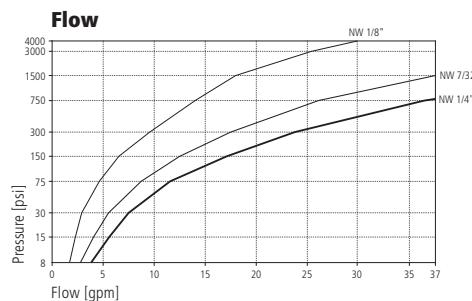

#### DGK

Part No.	G1 (M)	S1	NW	SW1	L1	L2	D1	D2	D3	Weight
<b>32.081</b>	1/4" NPTM	1/4"	1/8"	0.94	2.55	0.39	0.27	0.29	0.37	2.8 oz
<b>32.082</b>	1/4" NPTM	5/16"	7/32"	0.94	2.63	0.39	0.33	0.34	0.44	2.8 oz
<b>32.089</b>	1/4" NPTM	3/8"	1/4"	0.94	2.70	0.39	0.40	0.42	0.54	2.6 oz
<b>32.181</b>	3/8" NPTM	1/4"	1/8"	0.94	2.59	0.43	0.27	0.29	0.37	3.2 oz
<b>32.182</b>	3/8" NPTM	5/16"	7/32"	0.94	2.68	0.43	0.33	0.34	0.44	3.3 oz
<b>32.189</b>	3/8" NPTM	3/8"	1/4"	0.94	2.76	0.43	0.40	0.42	0.54	4.8 oz

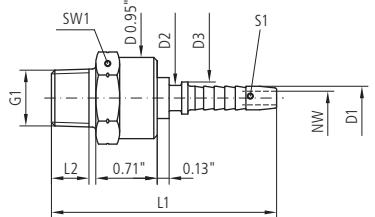

#### DGK 90°

Part No.	G1 (M)	S1	NW	SW1	L1	L2	D1	D2	D3	Weight
<b>32.381</b>	1/4" NPTM	1/4"	1/8"	0.94	1.95	0.39	0.27	0.29	0.37	5.3 oz
<b>32.382</b>	1/4" NPTM	5/16"	7/32"	0.94	1.97	0.39	0.33	0.34	0.44	5.3 oz
<b>32.389</b>	1/4" NPTM	3/8"	1/4"	0.94	2.10	0.39	0.40	0.42	0.54	6.0 oz
<b>32.481</b>	3/8" NPTM	1/4"	1/8"	0.94	1.95	0.43	0.27	0.29	0.37	5.5 oz
<b>32.482</b>	3/8" NPTM	5/16"	7/32"	0.94	1.97	0.43	0.33	0.34	0.44	5.7 oz
<b>32.489</b>	3/8" NPTM	3/8"	1/4"	0.94	2.10	0.43	0.40	0.42	0.54	6.2 oz



#### Legend

M.. = metric thread, ..M = male, F = female, G = gas pipe thread, QV = quick connects, SV = profile ring fitting  
 D = diameter, k = conical, L = length, NW = nominal width, SW = wrench size