




Scan this QR Code
for more information

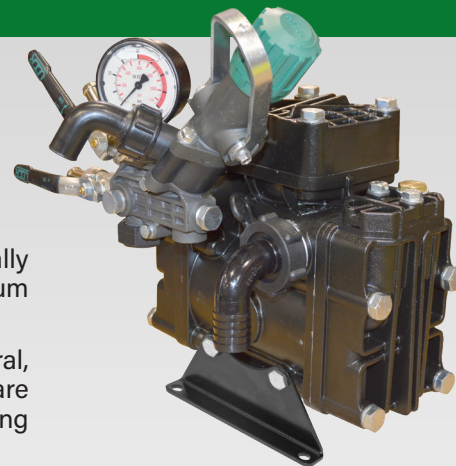


GREENTECH Diaphragms Standard. Buna-N Optional.

DELTA 40 2-cylinder, medium pressure diaphragm pumps are internally manifolded with anodized aluminum construction and anodized aluminum and stainless steel liquid handling parts.


DELTA 40 pumps are excellent choices for various horticultural, agricultural, lawn care, nursery, pest control and turf spraying applications. They are also effectively used for aircraft de-icing, hydrostatic testing and cleaning applications.



DELTA 40

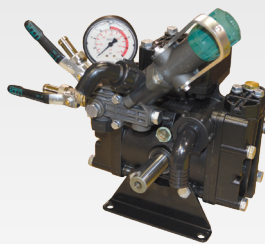

DELTA 40 TSFVA

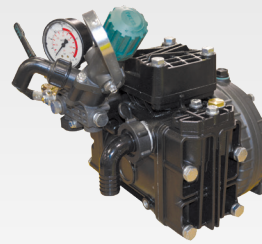

DELTA 40 GR3/4

Model	GPM	l/min	PSI	bar	RPM	Drive Configuration	Weight
DELTA 40	10.5	40.0	560	40	550	25 mm Solid Keyed Shaft. Mounting Rails	29 LBS
DELTA 40 TSFVA	10.5	40.0	560	40	550	25 mm Solid Keyed Shaft x Universal VA Drive Face. Mounting Rails	29 LBS
DELTA 40 GR3/4	10.5	40.0	560	40	550	Gear Reduction for 3/4" Shaft Gas Engine, 4-6.5 HP	39 LBS

Specifications


DELTA 40

Inlet Port	1" Hose Barb
Outlet Ports	(2) 1/2" Hose Barb
Bypass	3/4" Hose Barb
Piston Diameter	55mm
Crankshaft Stroke/Code	15.0mm / T
Dimensions	10.5"L x 11.5"W x 10.5"H

Lubrication: Requires 20 oz. of Udor Lube 40W Premium Pump Oil.
Alternate Oil: 30W non-detergent or 15W-40 non-detergent oil.

QUICK REFERENCE SERVICE PARTS

Description	Part #
Diaphragm Kit (GREENTECH)	6062.G4
Diaphragm Bolt / Washer Kit	6062.B4
Valve Kit	6062.G3
Regulator Repair Kit	6062.55
Regulator Repair Kit, Steel Poppet (Optional)	6062.53
Complete Repair Kit	8700.85CK

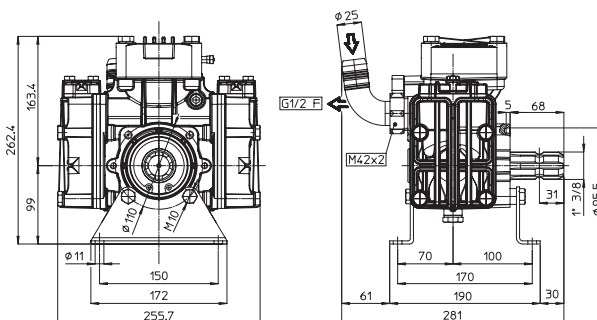

Dimensional Drawings are
Shown in Millimeters.
To Convert to Inches,
Multiply Dimension x 0.03937

Recommended Accessories and Drive Options



6010.24

Control Unit
Regulator w/Gauge



5071.75

Gear Reduction
3/4" Shaft Gas Engine



0016.04

Venturi Agitator
1/2" MNPT Inlet



163.604.4
163.604.6

3/8" & 1/2" HB Elbow



UD1-16

1" HI-Flow Filter
16 Mesh Screen



15.5823

Udor Lube
Premium Pump Oil