




Scan this QR Code
for more information



GREENTECH Diaphragms Standard. Buna-N Optional.

ZETA 170 low pressure 4-cylinder diaphragm pumps have anodized aluminum bodies with plasticized aluminum heads, stainless steel valves and glass-filled nylon manifolds. A pulsation dampener standard on all models.

ZETA 170 pumps are excellent for various horticultural and agricultural spraying applications.

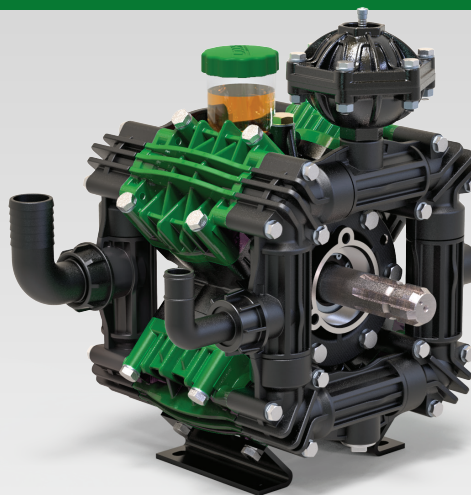

ZETA 170 1C



ZETA 170 TS2C



ZETA 170 MI1

Model	GPM	l/min	PSI	bar	RPM	Drive Configuration	Weight
ZETA 170 1C	45.0	170	300	20	550	1-3/8" 6-Spline Male PTO Shaft	58 LBS
ZETA 170 TS2C	45.0	170	300	20	550	1-3/8" 6-Spline Male PTO Thru-Shaft	58 LBS
ZETA 170 MI1	45.0	170	300	20	550	2-Bolt, A-Flange, 1" Hollow Shaft for Hydraulic Motor	58 LBS

Specifications


ZETA 170

Inlet Port	1-1/2" Hose Barb
Outlet Port	1" Hose Barb
Piston Diameter	75.0mm
Crankshaft Stroke/Code	18.0mm / E
Dimensions	15.5"L x 12.5"W x 17.5"H

Lubrication: Requires 44 oz. of Udor Lube 40W Premium Pump Oil.
Alternate Oil: 30W non-detergent or 15W-40 non-detergent oil.

QUICK REFERENCE SERVICE PARTS

Description	Part #
Diaphragm Kit - GREENTECH	6062.H3
Diaphragm Bolt & Washer Kit	6062.24
Valve Kit	6062.D5
Complete Repair Kit	8700.09CK

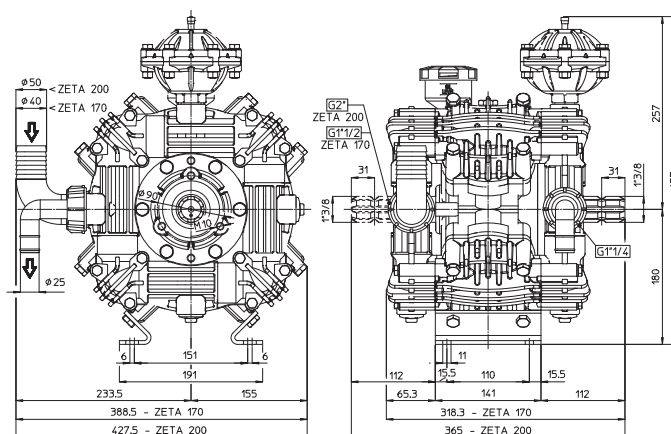

Dimensional Drawings are
Shown in Millimeters.
To Convert to Inches,
Multiply Dimension x 0.03937

Recommended Accessories and Drive Options



OMP-100
HD Hydraulic Motor
2-Bolt A-Flange Mount



6066.09
Shaft Protector
and Mounting Bolts



6066.05
PTO Drive
Safety Shield



VRG-400
Pressure
Regulator



15.5823
Udor Lube
Premium Pump Oil