




Scan this QR Code
for more information



GREENTECH Diaphragms Standard. Buna-N Optional.

ZETA 230 & 260 low pressure 6-cylinder diaphragm pumps have anodized aluminum bodies with plasticized aluminum heads, stainless steel valves and glass-filled nylon manifolds.

ZETA 230 & 260 pumps are excellent for various horticultural and agricultural spraying applications.

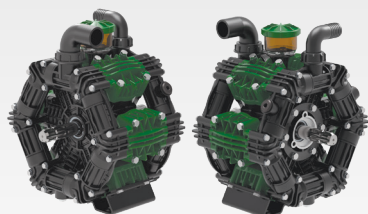

ZETA 230 TS2C / ZETA 260 TS2C



ZETA 260 MI1 . ZETA 260 MI1



Model	GPM	l/min	PSI	bar	RPM	Drive Configuration	Weight
ZETA 230 TS2C	61.0	228.0	300	20	550	1-3/8" 6-Spline Male PTO Thru-Shaft	80 LBS
ZETA 230 MI1	61.0	228.0	300	20	550	2-Bolt, A-Flange, 1" Hollow Shaft for Hydraulic Motor	80 LBS
ZETA 260 TS2C	68.0	256.0	300	20	550	1-3/8" 6-Spline Male PTO Thru-Shaft	80 LBS
ZETA 260 MI1	68.0	256.0	300	20	550	2-Bolt, A-Flange, 1" Hollow Shaft for Hydraulic Motor	80 LBS

Specifications	ZETA 230	ZETA 260
Inlet Port	2" Hose Barb	2" Hose Barb
Outlet Ports - Valve	1-1/2" Hose Barb	1-1/2" Hose Barb
Piston Diameter	75.0mm	75.0mm
Crankshaft Stroke/Code	16.0mm / X	18.0mm / E
Dims. - Pump Only	14.5" L x 15.5" W x 18.5" H	

Lubrication: Requires 90 oz. of Udor Lube 40W Premium Pump Oil.
Alternate Oil: 30W non-detergent or 15W-40 non-detergent oil.

QUICK REFERENCE SERVICE PARTS

Description	Part #
Diaphragm Kit - GREENTECH	6062.H4
Diaphragm Bolt & Washer Kit	6062.28
Valve Kit	6062.D3
Complete Repair Kit	8700.44CK

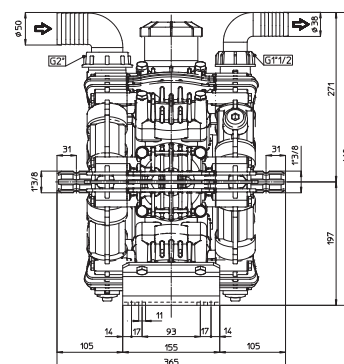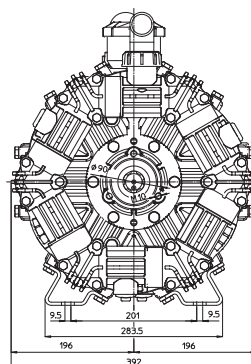

Dimensional Drawings are
Shown in Millimeters.
To Convert to Inches,
Multiply Dimension x 0.03937

Recommended Accessories and Drive Options



OMP-100
HD Hydraulic Motor
2-Bolt A-Flange Mount



6066.09
Shaft Protector
and Mounting Bolts



6066.05
PTO Drive
Safety Shield



VRG-400
Pressure
Regulator



15.5823
Udor Lube
Premium Pump Oil