

200 SERIES - 207V/M18



SPECIFICATIONS


Max Pressure (psi) 800
Open Flow (gpm) 1.29
Seals V-Rings
O-Rings Buna
Inlet Ports (2) - 3/8" NPT (F)
Discharge Ports (2) - 3/8" NPT (F)
Max Fluid Temp (°F) 140
Voltage Dual 120/230VAC 60/50Hz

MATERIALS

Body Anodized Aluminum
Plunger Stainless Steel
Valves Stainless Steel
Fasteners Stainless Steel

EXAMPLE

CAM	AMPS	PSI	GPM
.110	5.65	500	.97

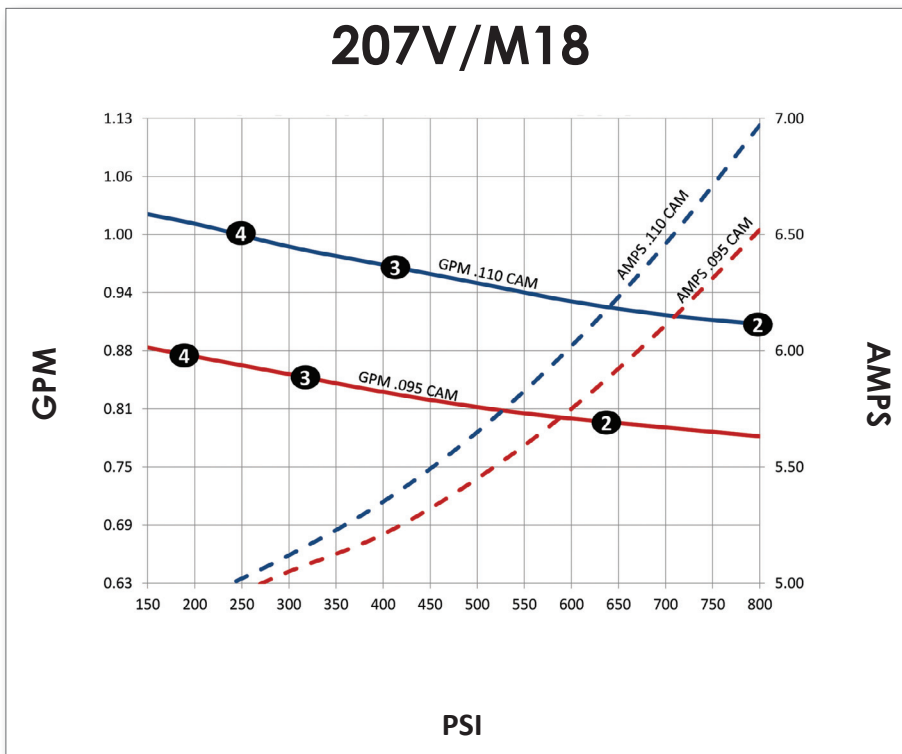

Data recorded pumping water at room temperature and 115V AC power.
 Actual performance will vary with voltage, application, and mfg tolerances.
 Copyright PumpTec, Inc. 2014

230V CHART CAN BE FOUND
 @ WWW.PUMPTec.COM

- Spraying Systems Co. nozzle sizes
- * Standard cams shown, more cams available upon request

