

>



Model Number: 970517505

Husqvarna 970517505, Demolition Robot DXR 305, 27 kW, NA, P1, DC, GTIN 805544522854

Manufacturer: Husqvarna Equipment

Husqvarna 970517505, Demolition Robot DXR 305, 27 kW, NA, P1, DC, GTIN 805544522854

All Sales Final. Full Factory Parts Warranty, but not returnable.

Wire Transfer Payment Only.

Description

DXR 305 is our most powerful remote-controlled demolition robot. Together with the hammer, SB 302, it has the highest power-to-weight ratio in its class on the market. With an impressive 27 kW power and only 78 cm wide it fits through all normal doorways. This unique combination opens up a very wide application window. The arm delivers long reach, precise positioning of the tool and requires minimal servicing. The outriggers are individually controlled and combined with a large footprint providing superior stability which enables high workload. Equipped with a superior remote control for safer operation and easy maneuverability. The sturdy DXR 305 is a versatile demolition robot for both the construction and process industry. Combine it with a variety of tools like hammers or our compact and versatile crushers and steel shearer. For the toughest applications we recommend our additional feature packages. For DXR 305 we offer extended hydraulic function and cylinder protection package, enhanced cooling and heat protection. This enables you to work with the machine in high ambient temperatures and with the tool in a high radiation heat. The packages can be ordered as accessories or installed direct from the factory.

Features

- Increased performance
- Safer operation
- Superior remote control
- Live operating surveillance
- Superb power-to-weight ratio
- Hydraulic feature P1 installed from factory
- Fits through all normal doorways
- Ergonomic shoulder hook
- 360 degrees rotatable arm
- Compact design and low weight
- Precise positioning
- Superior stability

>

- Stable arm with low maintenance
- Comfortable operation
- Flexible set-up of individual parameters
- High work efficiency
- Easy transportation
- Easy access for servicing
- Castered baseplate in one piece
- Superb illumination
- Automatic greasing of the breaker

Specification

Motor

Rated input power

36 hp

Frequency

50/60 Hz

Battery



Battery Chemistry

Li-Ion

Hydraulics

Oil capacity

1,420 fl oz


Hydraulic oil flow

22.5 gal/min

Hydraulic pressure, max

3,626 psi

Other

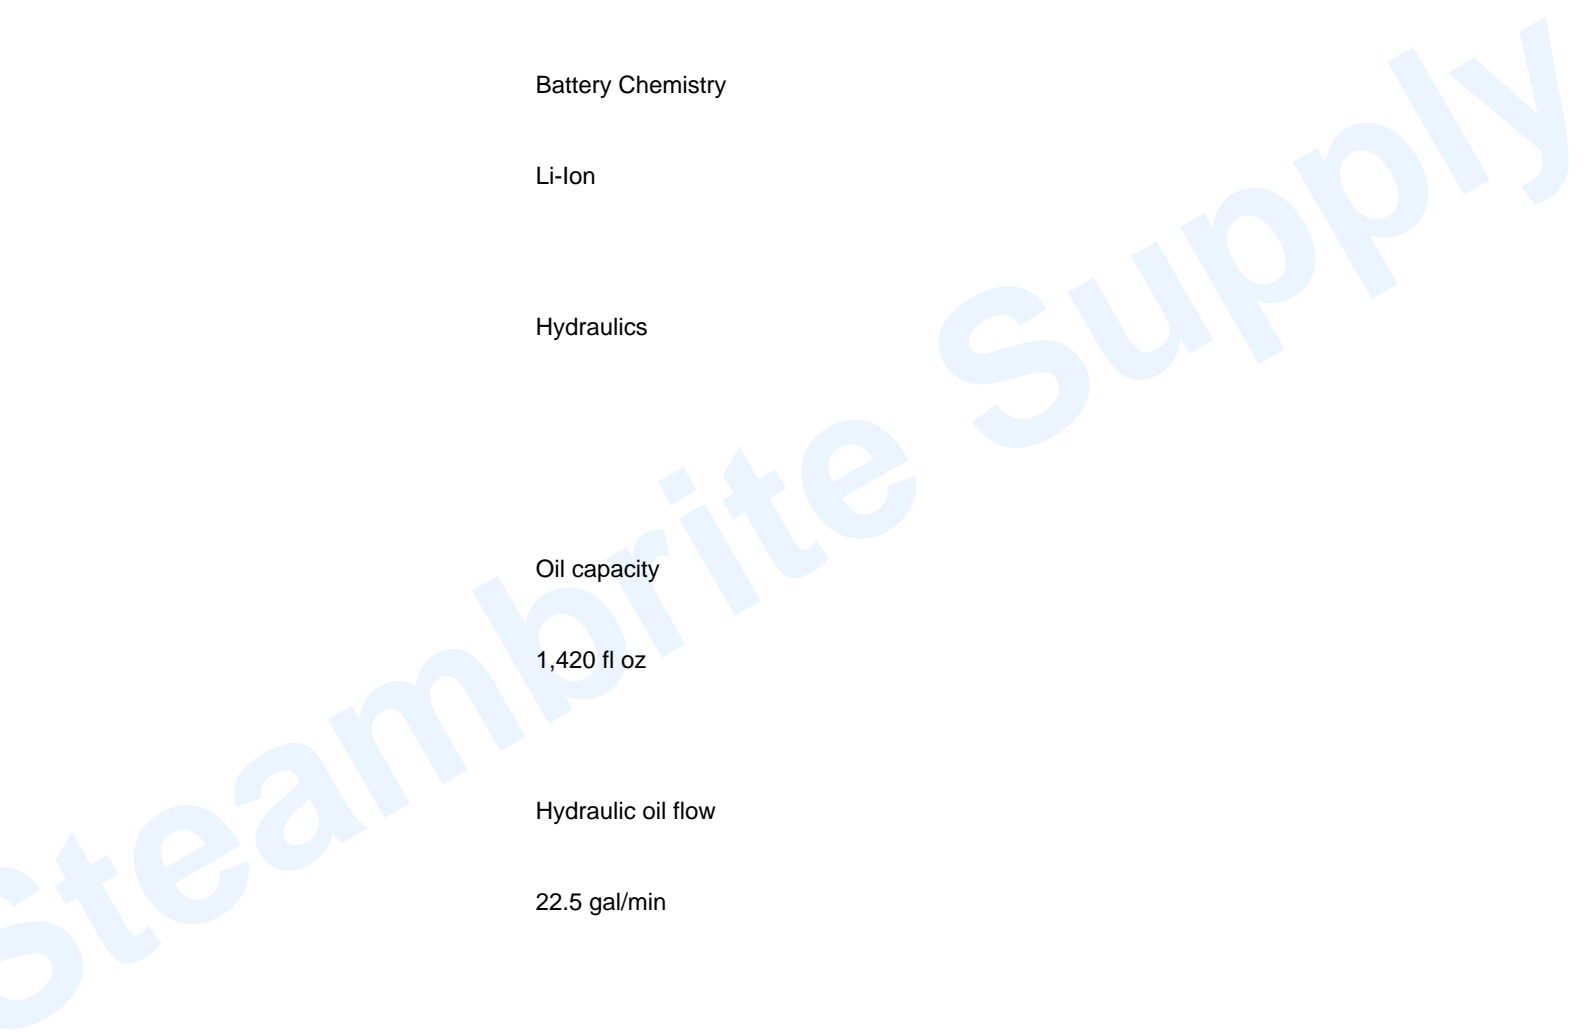

>

Factory option

Extended hydraulic function & cylinder protection

Telescopic arm

No

Range of wireless transmission

Up to 300 m

Signal transmission

Radio/cable

Radio

2.4 GHz

Dimensions



Reach (up)

204.72 in

Reach (forward)

192.91 in

Product size length

111 in

Product size width


31 in

Product size height

54 in

Weight

4,302.99 lbs

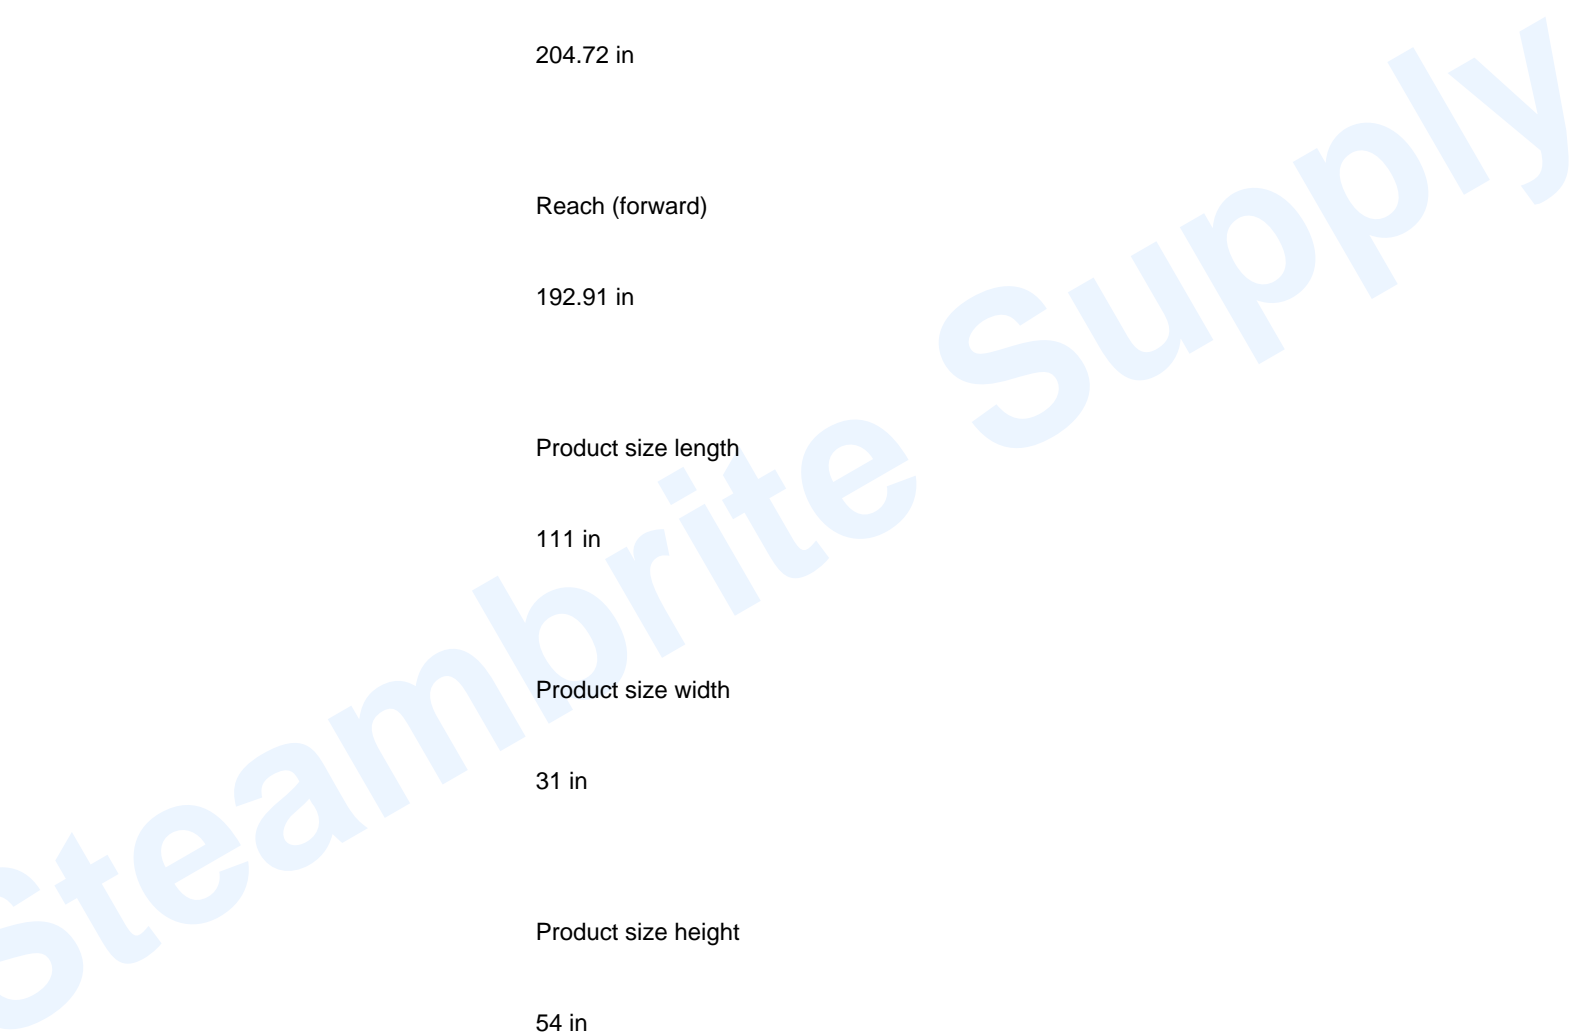

>

Packaging length (Calc)

119.291 in

Packaging width (Calc)

37.402 in

Packaging height (Calc)

75.591 in

Article gross weight (Calc)

4,916.308 lbs

Documentation
Quick Guides
Optional

Husqvarna 966786401 DCR 300 Demolition Claw 17Inch Opening
604Lbs Cuts Rebar Up To 1.18Inches ENO50

>

Availability: This product was added to our catalog on Saturday 27 December, 2025