

>



Model Number: 4035000

Phoenix 4035000, AirMax Red Low Profile Air Mover

Manufacturer: Phoenix

Phoenix 4035000, AirMax Red Low Profile Air Mover

LIMITED STOCK! 11 in Stock! This listing for Red model.

Description

With its Patent Pending, motor support x-bracket and optimized outlet shape, the Phoenix AirMAX delivers airflow of 925 CFM. This gives you high velocity air over a 25% larger area than other low profile air movers. In addition, the Phoenix AirMAX is stable in all 4 drying positions to maximize flexibility.

The Phoenix AirMAX is the safest fan in its class providing a quality GFCI convenience receptacle that protects not only connected loads, but onboard components as well. This is unlike competing fans that require external GFCI protection. In addition, where competitors position high voltage electrical connections low to the floor, the leading edge design of the Phoenix AirMAX allows these connections to be located more than 4 times the minimum required height. The Phoenix AirMAX is built to keep the contractor and their customers safe.

Features:

- 925 CFM
- 1.9 Amps
- Onboard circuit breaker and branch protection GFCI
- Daisy chain up to 6 fans on a single 15 Amp circuit
- Ultra secure stacking and cord wrap
- Heavy wall polypropylene housing
- Cord 16ft Power Cord
- ETL Tested to UL and CSA Standards

Phoenix AirMax Radial Air Mover, Red 4035000-1

Description

The Phoenix AirMax is the new leader in performance, convenience, portability, and safety for low-profile air movers. Its compact 20 1/2" X 17" footprint and 8 7/8" height make it the most compact and portable fan in its class. You'll be able to maintain the solid control required when packing and unpacking lots of air movers thanks to the rugged molded-in handle featured on the AirMax. This unit also features an easy-winding cord wrap and multiple securement options that make it a snap to prepare for transport. Because of its deeply molded interlocking features, the Phoenix AirMax is rock solid when stacked for transport.

With its Patent Pending, motor support x-bracket and optimized outlet shape, the Phoenix AirMax delivers airflow of 925 CFM. This gives you high velocity air over a 25% larger area than other low profile air movers. In addition, the Phoenix AirMax is stable in all 4 drying positions to maximize flexibility.

>

The Phoenix AirMax is the safest fan in its class providing a quality GFCI convenience receptacle that protects not only connected loads, but onboard components as well. This is unlike competing fans that require external GFCI protection. In addition, where competitors position high voltage electrical connections low to the floor, the leading edge design of the Phoenix AirMax allows these connections to be located more than 4 times the minimum required height. The Phoenix AirMax is built to keep the contractors and their customers safe.

Features and Specifications

- 925 CFM
- 1.9 Amps
- Onboard circuit breaker and branch protection GFCI
- Daisy chain up to 6 fans on a single 15 amp circuit
- Ultra secure stacking and cord wrap
- Heavy wall polypropylene housing
- Cord 16ft Power Cord
- ETL Tested to UL and CSA Standards
- Product Type: Radial Air Mover
- Voltage Rating: 120 VAC
- Amperage Rating: 1.9 A
- Air Flow Capacity: 925 cfm
- Cord Length: 20 ft
- Overall Length: 20-1/2 in
- Overall Width: 17 in
- Overall Height: 8-7/8 in
- Housing Color: Red
- Plug Type: Snap-Lock
- Weight: 20.260

Normal
0

false
false
false

EN-US
X-NONE
X-NONE

>

DefSemiHidden="false" DefQFormat="false" DefPriority="99"
LatentStyleCount="376">

UnhideWhenUsed="true" QFormat="true" Name="heading 2" />

UnhideWhenUsed="true" QFormat="true" Name="heading 3" />

UnhideWhenUsed="true" QFormat="true" Name="heading 4" />

UnhideWhenUsed="true" QFormat="true" Name="heading 5" />

UnhideWhenUsed="true" QFormat="true" Name="heading 6" />

UnhideWhenUsed="true" QFormat="true" Name="heading 7" />

UnhideWhenUsed="true" QFormat="true" Name="heading 8" />

UnhideWhenUsed="true" QFormat="true" Name="heading 9" />

Name="index 1" />

Name="index 2" />

Name="index 3" />

>

Name="index 4" />

Name="index 5" />

Name="index 6" />

Name="index 7" />

Name="index 8" />

Name="index 9" />

UnhideWhenUsed="true" Name="toc 1" />

UnhideWhenUsed="true" Name="toc 2" />

UnhideWhenUsed="true" Name="toc 3" />

UnhideWhenUsed="true" Name="toc 4" />

UnhideWhenUsed="true" Name="toc 5" />

UnhideWhenUsed="true" Name="toc 6" />

UnhideWhenUsed="true" Name="toc 7" />

UnhideWhenUsed="true" Name="toc 8" />

UnhideWhenUsed="true" Name="toc 9" />

Name="Normal Indent" />

Name="footnote text" />

Name="annotation text" />

Name="header" />

Name="footer" />

Name="index heading" />

UnhideWhenUsed="true" QFormat="true" Name="caption" />

Name="table of figures" />

Name="envelope address" />

Name="envelope return" />

>

Name="footnote reference" />

Name="annotation reference" />

Name="line number" />

Name="page number" />

Name="endnote reference" />

Name="endnote text" />

Name="table of authorities" />

Name="macro" />

Name="toa heading" />

Name="List" />

Name="List Bullet" />

Name="List Number" />

Name="List 2" />

Name="List 3" />

Name="List 4" />

Name="List 5" />

Name="List Bullet 2" />

Name="List Bullet 3" />

Name="List Bullet 4" />

Name="List Bullet 5" />

Name="List Number 2" />

Name="List Number 3" />

Name="List Number 4" />

Name="List Number 5" />

>

Name="Closing" />

Name="Signature" />

UnhideWhenUsed="true" Name="Default Paragraph Font" />

Name="Body Text" />

Name="Body Text Indent" />

Name="List Continue" />

Name="List Continue 2" />

Name="List Continue 3" />

Name="List Continue 4" />

Name="List Continue 5" />

Name="Message Header" />

Name="Salutation" />

Name="Date" />

Name="Body Text First Indent" />

Name="Body Text First Indent 2" />

Name="Note Heading" />

Name="Body Text 2" />

Name="Body Text 3" />

Name="Body Text Indent 2" />

Name="Body Text Indent 3" />

Name="Block Text" />

Name="Hyperlink" />

Name="FollowedHyperlink" />

Name="Document Map" />

>

Name="Plain Text" />
Name="E-mail Signature" />
Name="HTML Top of Form" />
Name="HTML Bottom of Form" />
Name="Normal (Web)" />
Name="HTML Acronym" />
Name="HTML Address" />
Name="HTML Cite" />
Name="HTML Code" />
Name="HTML Definition" />
Name="HTML Keyboard" />
Name="HTML Preformatted" />
Name="HTML Sample" />
Name="HTML Typewriter" />
Name="HTML Variable" />
Name="Normal Table" />
Name="annotation subject" />
Name="No List" />
Name="Outline List 1" />
Name="Outline List 2" />
Name="Outline List 3" />
Name="Table Simple 1" />
Name="Table Simple 2" />
Name="Table Simple 3" />
Name="Table Classic 1" />

>

Name="Table Classic 2" />

Name="Table Classic 3" />

Name="Table Classic 4" />

Name="Table Colorful 1" />

Name="Table Colorful 2" />

Name="Table Colorful 3" />

Name="Table Columns 1" />

Name="Table Columns 2" />

Name="Table Columns 3" />

Name="Table Columns 4" />

Name="Table Columns 5" />

Name="Table Grid 1" />

Name="Table Grid 2" />

Name="Table Grid 3" />

Name="Table Grid 4" />

Name="Table Grid 5" />

Name="Table Grid 6" />

Name="Table Grid 7" />

Name="Table Grid 8" />

Name="Table List 1" />

Name="Table List 2" />

Name="Table List 3" />

Name="Table List 4" />

Name="Table List 5" />

Name="Table List 6" />

>

Name="Table List 7" />

Name="Table List 8" />

Name="Table 3D effects 1" />

Name="Table 3D effects 2" />

Name="Table 3D effects 3" />

Name="Table Contemporary" />

Name="Table Elegant" />

Name="Table Professional" />

Name="Table Subtle 1" />

Name="Table Subtle 2" />

Name="Table Web 1" />

Name="Table Web 2" />

Name="Table Web 3" />

Name="Balloon Text" />


Name="Table Theme" />



Name="List Paragraph" />

Name="Intense Quote" />

Steambrite Supply



Steambrite Supply

Name="Subtle Emphasis" />

Name="Intense Emphasis" />

Name="Subtle Reference" />

Name="Intense Reference" />

UnhideWhenUsed="true" Name="Bibliography" />

UnhideWhenUsed="true" QFormat="true" Name="TOC Heading" />

>

Name="Grid Table 1 Light Accent 1" />

Name="Grid Table 6 Colorful Accent 1" />

Name="Grid Table 7 Colorful Accent 1" />

Name="Grid Table 1 Light Accent 2" />

Name="Grid Table 6 Colorful Accent 2" />

Name="Grid Table 7 Colorful Accent 2" />

Name="Grid Table 1 Light Accent 3" />

Name="Grid Table 6 Colorful Accent 3" />

Name="Grid Table 7 Colorful Accent 3" />

Name="Grid Table 1 Light Accent 4" />

>

Name="Grid Table 6 Colorful Accent 4" />

Name="Grid Table 7 Colorful Accent 4" />

Name="Grid Table 1 Light Accent 5" />

Name="Grid Table 6 Colorful Accent 5" />

Name="Grid Table 7 Colorful Accent 5" />

Name="Grid Table 1 Light Accent 6" />

Name="Grid Table 6 Colorful Accent 6" />

Name="Grid Table 7 Colorful Accent 6" />

Name="List Table 1 Light Accent 1" />

Name="List Table 6 Colorful Accent 1" />

Name="List Table 7 Colorful Accent 1" />

Name="List Table 1 Light Accent 2" />

Name="List Table 6 Colorful Accent 2" />

Name="List Table 7 Colorful Accent 2" />

>

Name="List Table 1 Light Accent 3" />

Name="List Table 6 Colorful Accent 3" />

Name="List Table 7 Colorful Accent 3" />

Name="List Table 1 Light Accent 4" />

Name="List Table 6 Colorful Accent 4" />

Name="List Table 7 Colorful Accent 4" />

Name="List Table 1 Light Accent 5" />

Name="List Table 6 Colorful Accent 5" />

Name="List Table 7 Colorful Accent 5" />

Name="List Table 1 Light Accent 6" />

Name="List Table 6 Colorful Accent 6" />

Name="List Table 7 Colorful Accent 6" />

Name="Mention" />

Name="Smart Hyperlink" />

Name="Hashtag" />

Name="Unresolved Mention" />

Name="Smart Link" />

>

```
/* Style Definitions */
table.MsoNormalTable
{mso-style-name:"Table Normal";
mso-tstyle-rowband-size:0;
mso-tstyle-colband-size:0;
mso-style-noshow:yes;
mso-style-priority:99;
mso-style-parent:"";
mso-padding-alt:0in 5.4pt 0in 5.4pt;
mso-para-margin-top:0in;
mso-para-margin-right:0in;
mso-para-margin-bottom:8.0pt;
mso-para-margin-left:0in;
line-height:107%;
mso-pagination:widow-orphan;
font-size:11.0pt;
font-family:"Calibri",sans-serif;
mso-ascii-font-family:Calibri;
mso-ascii-theme-font:minor-latin;
mso-hansi-font-family:Calibri;
mso-hansi-theme-font:minor-latin;
mso-bidi-font-family:"Times New Roman";
mso-bidi-theme-font:minor-bidi;
mso-font-kerning:1.0pt;
mso-ligatures:standardcontextual;}
table.MsoTableGrid
{mso-style-name:"Table Grid";
mso-tstyle-rowband-size:0;
mso-tstyle-colband-size:0;
mso-style-priority:39;
mso-style-unhide:no;
border:solid windowtext 1.0pt;
mso-border-alt:solid windowtext .5pt;
mso-padding-alt:0in 5.4pt 0in 5.4pt;
mso-border-insideh:.5pt solid windowtext;
mso-border-insidev:.5pt solid windowtext;
mso-para-margin:0in;
mso-pagination:widow-orphan;
font-size:11.0pt;
font-family:"Calibri",sans-serif;
mso-ascii-font-family:Calibri;
mso-ascii-theme-font:minor-latin;
mso-hansi-font-family:Calibri;
mso-hansi-theme-font:minor-latin;
mso-bidi-font-family:"Times New Roman";
mso-bidi-theme-font:minor-bidi;
mso-font-kerning:1.0pt;
```

>

mso-ligatures:standardcontextual;}

SKU

128174

Catalog #

1614-2782

Pack Size

1/ea

UOM

Ea

Manufacturer Part #

4035000

Brand



Phoenix

Color

Red

Flow Rate

925 CFM

Amperage Rating

1.9 A

Voltage


115 v

Xactimate Code

WTR DRY

Certifications

cETLus

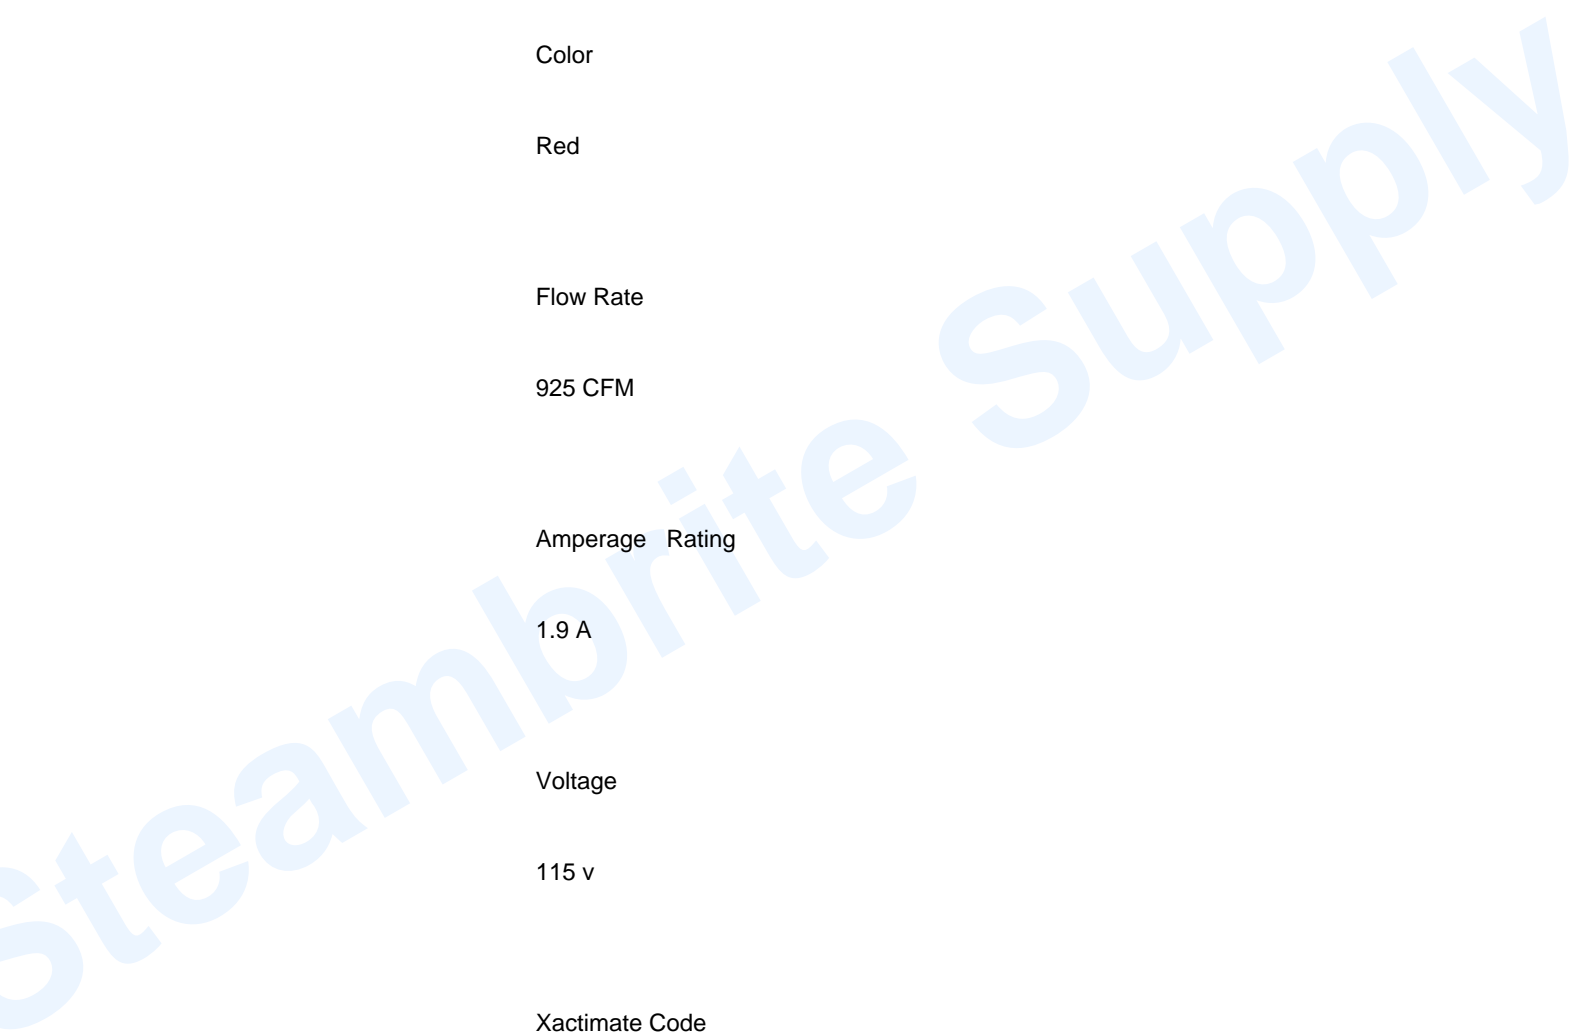

>

Availability: This product was added to our catalog on Friday 18 January, 2019